

30,000 LB. HD 4-POST

Challenger's 4030 series 4-post closed-front lifts are built with safety and durability in mind. We integrated our time-proven cable-driven lift system with heavy-duty steel sheaves and cables for optimal performance. A single-point air actuated lock release makes these lifts simple to use.

Choose between general service or alignment deck models as well as three lengths to fit your shop's needs. We also offer a range of optional accessories.



**TIME-TESTED
CABLE DRIVE**



**ALIGNMENT AND
FLAT DECK AVAILABLE**




4030
30,000 LB. CAPACITY
» Closed front 4-post lift


CL Challenger Lifts

WWW.CHALLENGERLIFTS.COM

FEATURES & BENEFITS

- » Cable-driven 30,000 lb. lift capacity
- » Closed front design with 244.5", 281" or 317" max wheelbase
- » Overall width provides an allowance for wide accessories such as plows and fixed mirrors
- » 71.75" rise height provides maximum head room for working underneath vehicles
- » Multiple locking positions for a variety of alignment and general service tasks
- » Compatible with the industry's latest camera imaging alignment systems
- » Adjustable lock ladders allow for a versatile install with sensitivity to uneven floors
- » Recessed turn plate pockets for easy drive-on (Alignment models only)
- » Single-point air actuated lock release disengages column locks simultaneously
- » Durable diamond-plate approach ramps for positive vehicle traction
- » Built-in runway rail system provides versatility to add convenience options like rolling jacks and oil drain pan (sold separately)

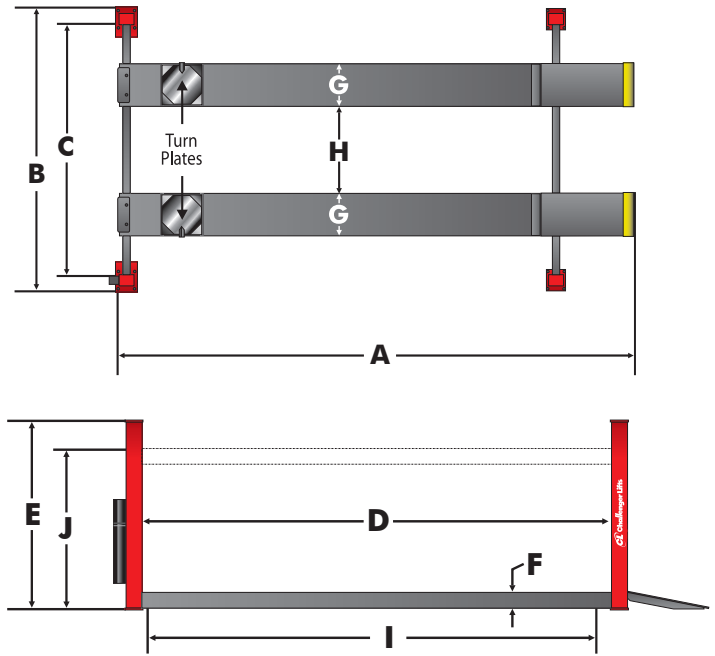

Model Number	4030SFX	4030EFX	4030XFX	4030SAX	4030EAX	4030XAX
Lifting Capacity	30,000 lbs.					
I Max. Wheelbase ¹	244.5"	281"	317"	244.5"	281"	317"
J Rise Height	71.75"					
A Overall Length	308"	344"	380"	308"	344"	380"
B Overall Width	172.75"					
C Inside Columns	152"					
D Between Columns	246.125"	282.625"	318.625"	246.125"	282.625"	318.625"
E Height of Columns	92.25"					
F Height of Runways	8.5"					
G Width of Runways	24"					
H Width Between Runways	46" - 52"					
Air Supply Required	90 - 120 psi					
Motor / Voltage (Single Phase Std)	3HP, 208v - 230v					
Speed of Rise	Approx. 126 s					
Max 2 Wheel Alignment	-	-	-	219.5"	256"	292"
Min Recommended Bay Size	28' x 17'	31' x 17'	34' x 17'	28' x 17'	31' x 17'	34' x 17'
ALI/ETL Certified	√	√	√	√	√	√
Column Colors Available						

¹ Maximum wheelbase is based on a tire diameter of 30." Standard lift colors are Red and Blue. Optional colors available.

For more information, contact your Authorized Challenger Lifts Distributor:



The Automotive Lift Institute (ALI) certifies that the 4030 described herein complies with the applicable provisions of the American National Standards ANSI/ALI ALCTV 2011 and is Third Party Validated by the ETL Testing Laboratory.