



BEST PRICE, BEST VALUE, RUGGED & SAFE.

AUTOMOTIVE AND LIGHT TRUCK GENERAL SERVICE
100% DESIGNED AND BUILT IN NORTH AMERICA

PEGASUS

4 POST LIGHT DUTY COMMERCIAL
LIFT FOR SERVICING SMALL CARS
OR LIGHT TRUCKS
19,000 LB. / 8.6T CAPACITY
DOUBLE WALL RUNWAYS WITH "Z" RAILS - 2 RUNWAYS
LENGTHS TO CHOOSE FROM




LSS4P19FD
LSS4P19FDXL

AVAILABLE IN GENERAL SERVICE OR FOR WHEEL
ALIGNMENT


December 2020

THE LIFTSUPERSTORE AND ALL ITS REGISTERED TRADE MARKS ARE PART OF THE TLS LIFT GROUP. PLEASE CALL
US FOR PRODUCT INFORMATION ON COMMERCIAL AND HEAVY DUTY LIFT PRODUCTS. WWW.TLSLIFTS.COM


OPTIONAL ACCESSORIES

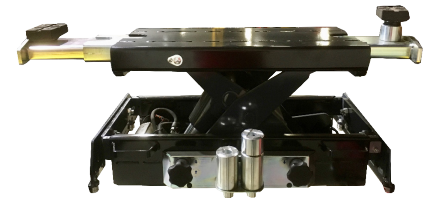


JACKING BEAM 7,500 LB. 3.4T CAPACITY
5 YR WARRANTY

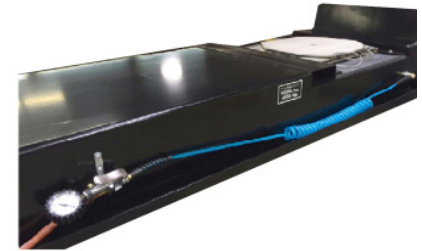

BUILT IN RUNWAY AIR INFLATION HOSES
& OPTIONAL FRONT RADIUS PLATES/REAR
SLIP PLATES

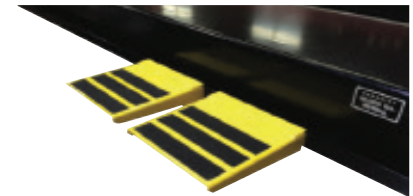

REMOVEABLE RUNWAY STEP PLATFORMS
WITH NON SLIP SURFACE

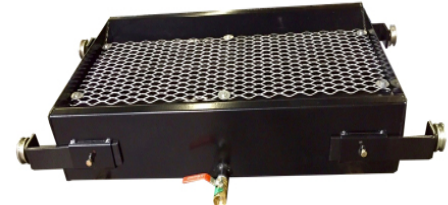

ROLLING 30 GALLON WASTE OIL
DRAIN

CONTACT US NOW WWW.LIFTSUPERSTORE.COM OR CALL 866-799-LIFT (5438)

4 POST SERVICE LIFT - "PEGASUS" 19000 LB. / 8.6T CAPACITY



LSS4P19FD
LSS4P19FDXL

CATEGORY	CLOSED FRONT FOUR POST FLAT DECK SERVICE LIFT
	CAPACITY 19,000 LB. (8.6T)
A	RAISED HEIGHT 74" (1880MM)
B	LOWERED HEIGHT 10" (254MM)
C	OVERALL LENGTH EXTENDED 301 3/8" (7655MM)
C	OVERALL LENGTH STANDARD 274 3/8" (6969MM)
D	DECK LENGTH EXTENDED 238" (6045MM)
D	DECK LENGTH STANDARD 210 3/8" (5344MM)
E	WIDTH BETWEEN RUNWAYS 41" (1041MM)
F	RUNWAY DECK WIDTH 23" (584MM)
G	OVERALL WIDTH FRONT/REAR 150" (3810MM)
H	MAX COLUMN HEIGHT 86" (2184MM)
	MAXIMUM WHEEL BASE EXT. 209" / 5309MM
	MAXIMUM WHEEL BASE WB STD. 182" / 4623MM
	LIFT TIME 70 SECONDS
	ALI CERTIFIED WITH GOLD LABEL YES
	POWER REQUIREMENTS 230V - 60HZ - 1PH - 25 AMP
	JACKING BEAM CAPACITY 9,000 LB. (4.1T)
	SHIPPING WEIGHT 5,000 LB. (2300 KG)

FEATURES

- BUILT TO HIGHER QUALITY STANDARD; 100% NORTH AMERICAN MADE - PREMIUM US BUCHER 2HP / 1.5KW POWER UNIT.
- CORROSION RESISTANT PROTECTION - STEEL COMPONENTS ARE WHEEL-A-BRATOR SHOT BLASTED AND ACID WASHED BEFORE A "DOUBLE BAKE" POWDER COAT FINISH IS APPLIED.
- SUPERIOR STRUCTURAL STRENGTH PROVIDES LONGER LIFE - NON FLEX DOUBLE WALL 23" / 584MM WIDE RUNWAYS WITH BUILT IN "Z" RAIL. HEAVY DUTY 10" X 8-3/8" X 1/4" WALL / 254MM X 213MM X 6MM WALL COLUMNS AND 3" X 8-1/4" / 72MM X 210MM TUBE TRAVERSE BEAMS.
- GREATER FLEXIBILITY WITH MORE MODELS TO CHOSE FROM - AVAILABLE IN TWO RUNWAY LENGTHS WITH BUILT IN WHEEL ALIGNMENT OR SERVICE DECK. LIFT CAN BE ORDERED IN RED OR BLUE.
- PREMIUM OPTIONS AND ACCESSORIES CAN EXPAND THE CAPABILITIES AND SERVICE LIFE - BUILT IN TIRE INFLATION HOSES, REMOVABLE WORK STEPS, LED RUNWAY LIGHTING AND PREMIUM LONG LIFE 5 YEAR WARRANTY HD JACKING BEAMS
- LOWER MAINTENANCE COSTS - ZIRK STYLE GREASE FITTINGS AT ALL 1-1/2" / 38MM PLATED HINGE PINS.
- EXTENDED LIFE "NON TWIST" CABLE DESIGN - MACHINED STEEL NICKEL PLATED 9" / 229MM PULLEYS WITH BRONZE SELF LUBRICATING BUSHINGS. NON SPIN FATIGUE RESISTANT 9/16" / 14MM CABLES ARE ROUTED ON DOUBLE STACKED PULLEYS (VERSUS FOUR STACKED) TO REDUCE STRESS AND WEAR.
- LOW PRESSURE HYDRAULICS PROVIDES LONGER LIFE - 4"ID X 65" / 102MM ID X 1651MM CYLINDER IS MOUNTED UNDER THE RUNWAY AND USE A PREMIUM "PARKER" SEAL AND WEAR RING WITH CHROME PLATED PLUNGER SHAFT.
- DESIGNED FOR OPTIMUM PRODUCTIVITY - SINGLE POINT CONTROL WITH STAINLESS STEEL CYLINDER AIR RELEASES ENGAGE 12 LOCKING POSITIONS. ADJUSTABLE LOCKING LADDERS 81" X 2-3/4" X 3/8" / 2057MM X 70MM X 9.5MM THICK ALLOW FOR ACCURATE LEVELLING. THERE ARE COMPRESSED AIR OUTLETS FRONT AND REAR.

Disclaimer: TLS Inc. is constantly updating their products to maintain the highest possible standards of performance and safety. The specifications included in this brochure are only accurate at the time of printing and are subject to change without notice.

ADDITIONAL FEATURES


EQUIPMENT FOOTPRINT



PREMIUM 9" (229MM) PULLEY AND CABLES 9/16" (14MM) CABLES





NORTH AMERICAN "BUCHER" 2 HP POWER UNIT



DOUBLE WALL DECK WITH Z RAIL



INCLUDES AIR REGULATOR WATER TRAP OILER

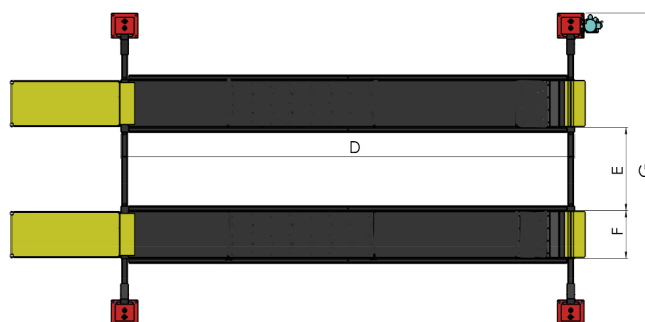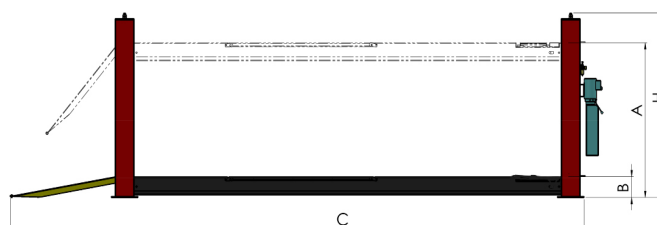

The Liftsuperstore
Retail locations throughout the USA - Florida, Texas, Wisconsin, Missouri, Virginia & Alabama
Call: 866-799-5438



December 2020