



LIBERATOR
LSS2P15CF
LSS2P18CF

MEDIUM DUTY COMMERCIAL LIFTS CAPABLE OF SAFELY SERVICING VEHICLES SMALL AND LARGE

LIBERATOR

2 POST

15,000 LB. / 6.8T OR
18,000 LB. / 8.2T CAPACITY




The Liftsuperstore and all its registered trade marks are part of the TLS Lift Group. Please call us for product information on commercial and heavy duty lift products. www.tlslifts.com

STANDARD FEATURES



North American Power Unit / Air Mechanical Locking System with Regulator

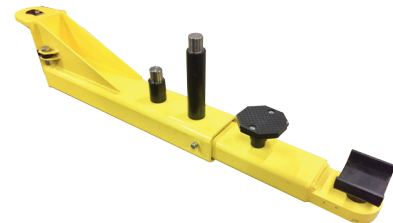

15,000 lb. / 7.3T Lift with 4" / 102mm Pad Height for Cars & Light Trucks - Drop in Stacking Adapters



18,000 lb. / 8.2T Lift with 5" / 127mm Pad Height for Light and Medium Trucks - Screw in Style Saddle Adapters

THE LIFTSUPERSTORE 2300 SPEERS RD OAKVILLE, ON L6L 2X8

PHONE (866) 799-5438

FAX (905) 891-1214

APRIL 2018

2 POST - "LIBERATOR"
15,000 LB. / 6.8T OR 18,000 LB. /
8.2T CAPACITY





15K / 7.3T LSS2P15CF
18k / 8.2T LSS2P18CF

SPECIFICATIONS

Capacity	15,000 lbs/ 6.8T	18,000 lbs/ 8.2T
Overall Width	152" / 3861mm	
Width Between Columns	120 1/2" / 3061mm	
Drive Thru Width	108" / 2743mm	
Overall Height	199 1/2" / 5067mm	
Under Bar Clearance	192 1/2" / 4890mm	
Lowered Height - Standard Lift Pad	4" / 102mm	5" / 127mm
Raised Height - Standard Lift Pad	76" / 1930mm	
Raise Height with Adapters	85" / 2159mm	86" / 2184mm
Lifting Time	70 seconds	
Front Arm Reach	34" to 62" / 864mm to 1575mm	
Rear Arm Reach	34" to 62" / 864mm to 1575mm	
Standard Power Requirements	220V-60Hz-1ph-25A	

EQUIPMENT FOOTPRINT

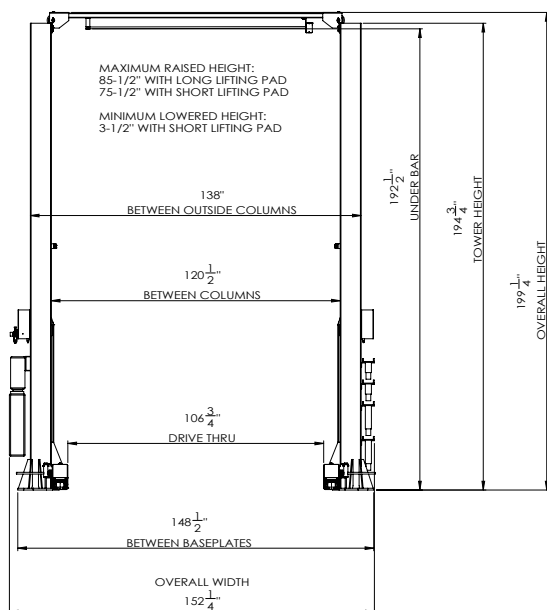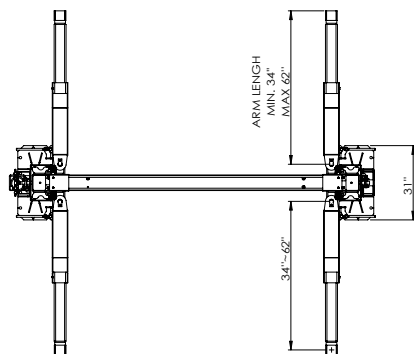

FEATURES

- Built to higher quality standard; 100% North American made - premium US made Monarch (Bucher) 4HP/ 3 kw power unit, 3/8" / 9.5mm non fatigue equalizing cables, 5" / 127mm steel pulleys and 2" / 51mm ID Hydraulic Cylinders.
- Greater flexibility - available in a 16,000 lb./ 7.3T capacity with lighter arms and a lowered pad height of 3-1/2" / 89mm or the heavy duty 18,000 lb./ 8.2T version with heavy non sag arms and a 5-1/2" / 140mm pad height.
- More working room for larger trucks - 120-1/2" / 3061mm between the inside of the columns and 192-1/2" / 4890mm under the shut off bar.
- Stronger and more stable structure - single piece columns 15" x 9" / 381mm x 230mm up to 199-1/4" / 5061mm tall can be custom ordered to fit your building. Large irregular shaped base plate 17" x 31" / 432 x 787mm.
- Corrosion resistant protection - steel components are wheelabrator shot blasted and acid washed before a "double bake" powder coat finish is applied.
- Lifts higher to provide more under car work area - the 72" / 1829mm long cylinder stroke provides 76" / 1930mm lift without adapters with a maximum attainable lift height of 85-1/2" / 2172mm.
- Ease of operation - Positive air release mechanical locking system with stainless steel air cylinders. Includes built in air regulator / filter water trap. Power unit can be installed on either side.
- Reduced vehicle setup time - "Drop in" steel saddle style lift adapters can be extended in height with 1-1/2" / 38mm, 4" / 102mm or 10" / 254mm steel adapters.

ADDITIONAL FEATURES



3/8" / 76mm non fatigue equalization cables and 5" / 127mm steel pulleys

Self Activating Arm Restraints



CONTACT US NOW

WWW.LIFTSUPERSTORE.COM OR CALL (866) 799-5438